




Ex-proof bizim işimiz

EJ SERIES INCREASED SAFETY JUNCTION BOX

CERTIFICATE : INSEMEX-OEC.ATEX.15.0352X

CE 1809  II 2 G Ex e ia II C T... Gb

CE 1809  II 2 G Ex d e II C T6/T5 Gb

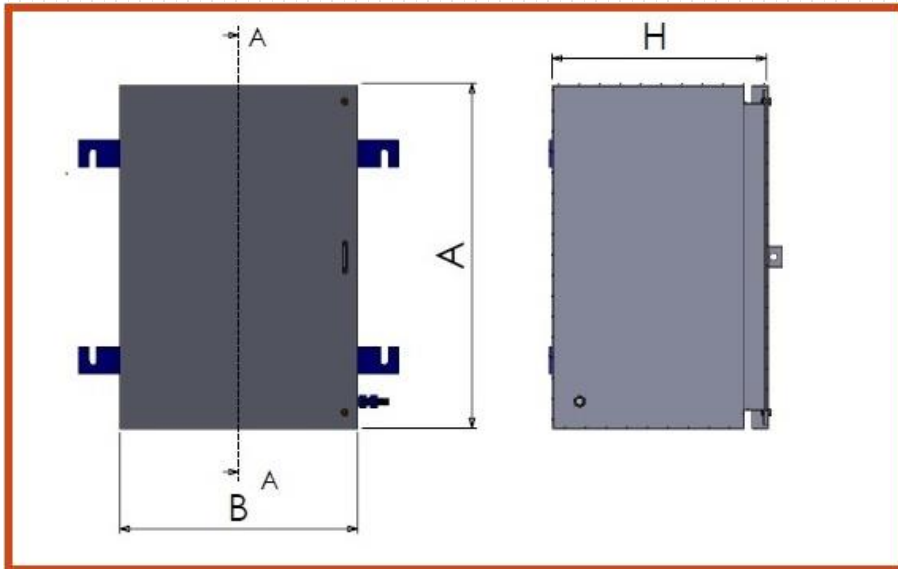

TYPE EJ...	A (mm.)	B (mm.)	H (mm.)
1A	116	116	91
1B	176	116	91
1C	223	116	91
1	123	123	80
2	250	153	75
3	153	153	75
4	153	153	120
5	253	153	145
6	293	263	160
7	305	263	195
8	376	263	170
9	376	263	210

TYPE EJ...	A (mm.)	B (mm.)	H (mm.)
10	413	263	160
11	425	263	145
12	413	263	250
13	425	373	160
14	425	373	250
15	523	373	250
16	574	373	195
17	640	450	250
18	720	550	170
19	760	550	250
20	880	640	250
21	1000	740	250



Ex-proof bizim işimiz

EJ SERIES INCREASED SAFETY JUNCTION BOX

CERTIFICATE : INSEMEX-OEC.ATEX.15.0352X

CE 1809  II 2 G Ex e ia II C T... Gb

CE 1809  II 2 G Ex d e II C T6/T5 Gb

APPLICABLE STANDARTS

EN 60079-0 ,EN 60079-1, EN 60079-7 ,EN 60079-11, EN 60079-31

MATERIAL

Stainless Steel or Steel or Aluminium

THREAD SIZE and TYPE

Tapered pipe thread ISO 7-1
NPT pipe thread ANSI B1.20.1

PROTECTION TYPE

IP66

