


## EV SERİSİ EX-PROOF AYDINLATMA ARMATÜRÜ

ATEX SERTİFİKA: INSEMEX-OEC.ATEX.18.0325X


CE  II 2 G Ex db II C T5/T4/T3 Gb

CE  II 2 D Ex tb III C T100°C/T135°C/T200°C Db


EVA-1100  
EVA-2200

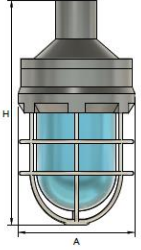


EVC-1100  
EVC-2200

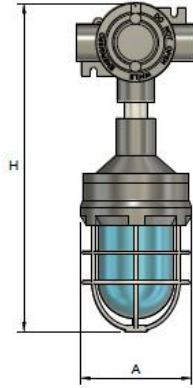

EVT-1100  
EVT-2200

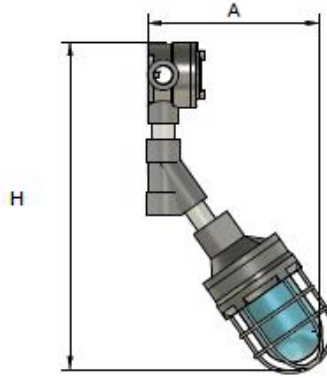

EVA-4  
EVA-5



Katalog No.	Max. Güç (Watt)	A (mm.)	H (mm.)
EVA-1100	100	130	220
EVA-2200	200	180	300
EVC-1100	100	130	355
EVC-2200	200	180	450

Katalog No.	Max. Güç (Watt)	A (mm.)	H (mm.)
EVT-1100	100	130	305
EVT-2200	200	180	358
EVA-4	100	165	230
EVA-5	200	225	360

### UYGULAMA ALANLARI

EV serisi ex-proof aydınlatma armatürleri, Zone-1, Zone-21, Zone-2 ve Zone-22 ex-proof ortamlarda kullanıma uygundur. Talebe uygun olarak 100 W veya 200 Watt tipinde imal edilir.

### MALZEME

Gövde; alüminyum döküm (ETİAL 171)  
Cam; Isıl işlem görmüş borosilikat cam  
Renk: RAL 7040(gri)

### TEKNİK ÖZELLİKLER

Enerji girişi : 220 V AC  
2x3/4" delikli  
E27 veya E40 duylu

### MEKANİK KORUMA SINIFI

IP 66