
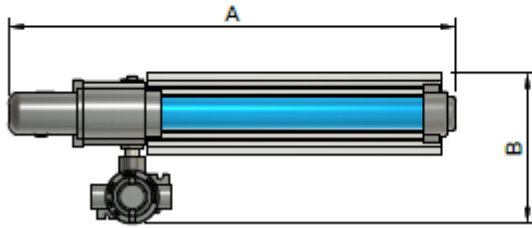



EVFPL SERİSİ EX-PROOF ŞERİT LED AYDINLATMA

ATEX SERTİFİKA: INSEMEX-OEC.ATEX.18.0301X

CE  II 2 G Ex db II C T6/T5 Gb

CE  II 2 D Ex tb III C T85°C/T100°C Db



Katalog No.	Güç (Watt)	şerit sayısı	A (mm.)	B (mm.)	H (mm.)	Işık şiddeti (lümen)
EVFPL-136	28	1	970	260	140	3500
EVFPL-236	28	2	970	370	140	6600
EVFPL-158	57	1	1570	260	140	6600
EVFPL-258	57	2	1570	370	140	13000

UYGULAMA ALANLARI

EVFPL serisi ex-proof şerit led aydınlatma armatürleri, Zone-1, Zone-21, Zone-2 ve Zone-22 ex-proof ortamlarda kullanıma uygundur. Talep edilirse kitli olarak da imal edilmektedir.

MALZEME

Gövde; alüminyum döküm (ETİAL 171)
Cam; Isıl işlem görmüş borosilikat cam
Renk: RAL 7040(gri)

TEKNİK ÖZELLİKLER

220 V, 50 Hz enerji girişli
2x3/4" delikli
Led driver ve PCB dahil
LM 79 Test raporlu

MEKANİK KORUMA SINIFI

IP 66