




## EX-PROOF ELECTRONIC GROUNDING DEVICE (EGD)

ATEX CERTIFICATE: INSEMEX-OEC.ATEX.18.0340X

CE  Ex d II G Ex d [ia] ia II B T6 Gb

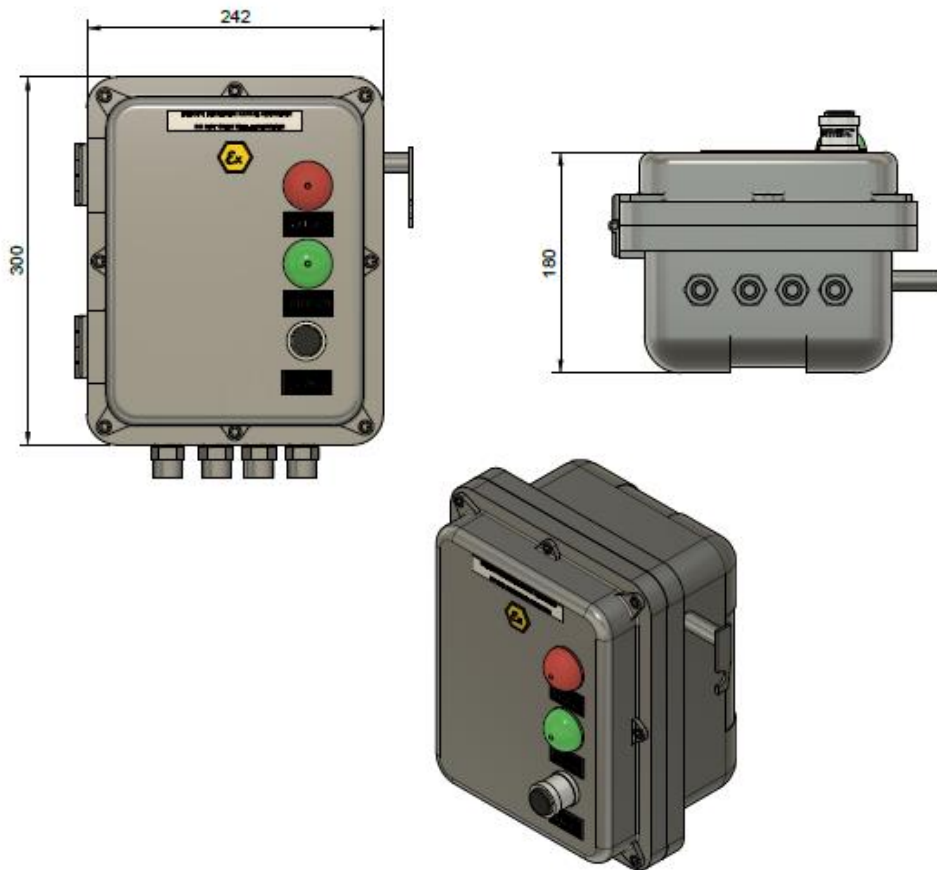

### APPLICATIONS

Ex-proof electronic grounding device, Zone-1, Zone-21, Zone-2 and Zone-22 suitable for use in ex-proof environments.

### MATERIAL

Body; aluminum casting (ETIAL 171)  
Colour: RAL 7040(grey)

### MECHANICAL PROTECTION TYPE

IP 66

### TECHNICAL SPECIFICATIONS

The operating voltage is 220V AC. Pliers on the grounding device, tanker Etc. Connected to the electrostatically charged device. It allows operation if the grounding resistance between the mains ground and the device is less than 20 ohms. In case of grounding connection faults (cut, rupture) that may occur during operation, it cuts off the electricity and the red light on it turns on.