
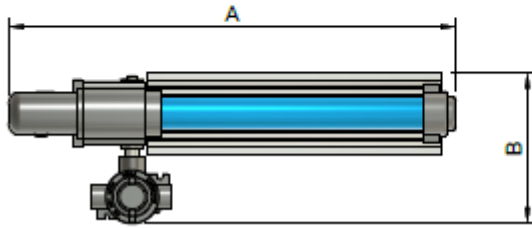



EVF SERİSİ EX-PROOF FLORESAN AYDINLATMA ARMATÜRÜ

ATEX SERTİFİKA: INSEMEX-OEC.ATEX.18.0301X

CE  II 2 G Ex d II C T6/T5 Gb

CE  II 2 D Ex tb III C T85°C/T100°C Db



Katalog No.	Güç (Watt)	Lamba sayısı	A (mm.)	B (mm.)	H (mm.)
EVF-118 E	18	1	970	260	140
EVF-218 E	18	2	970	370	140
EVF-136 E	36	1	1570	260	140
EVF-236 E	36	2	1570	370	140
EVF-158 E	58	1	1980	260	140
EVF-258 E	58	2	1980	370	140

UYGULAMA ALANLARI

EVF serisi floresan aydınlatma armatürleri, Zone-1, Zone-21, Zone-2 ve Zone-22 ex-proof ortamlarda kullanıma uygundur. Talep edilirse kitli olarak da imal edilmektedir.

MALZEME

Gövde; alüminyum döküm (ETİAL 171)
Cam; Isıl işlem görmüş borosilikat cam
Renk: RAL 7040(gri)

TEKNİK ÖZELLİKLER

220 V, 50 Hz enerji girişli
2x3/4" delikli
T8 floresan duylu
Elektronik balastlı

MEKANİK KORUMA SINIFI

IP 66