


ETW TUŞLU TELEFON

Sertifika : TSE – Ex , TSE 3380
EEx de i(a) II B T6

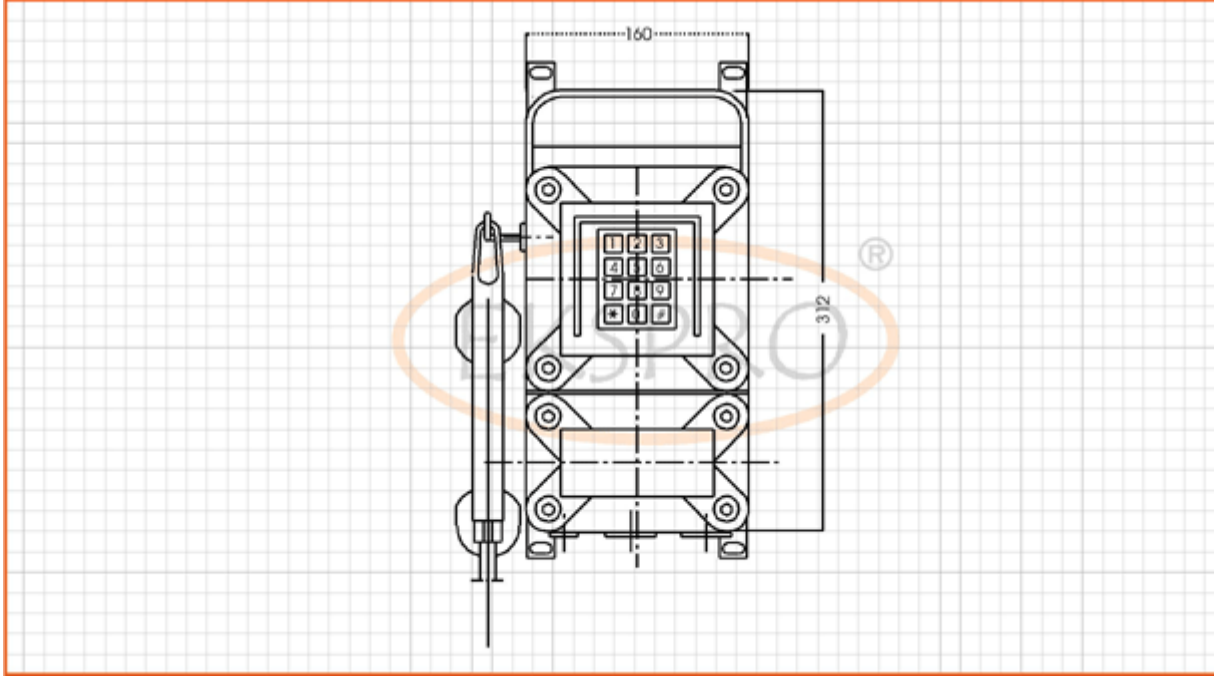

ZİL GERİLİMİ : 30 - 70 V
(16/25 Hz)
ZENER BARİYER : 6V, 140 OHM
MİKROFON / KULAKLIK : DİNAMİK

UYDUĞU STANDARTLAR

EN 50014 / 50018 (EEx d II-B T6)
IEC 79.1

MALZEME

Alüminyum – Etibank Etial 140
Bakır Miktarı < % 0.01
Cihaz Rengi : RAL7030

DELİK ÖLÇÜ ve DIŞ TIPLERİ

3/4" Withwort boru dişi TS61

Seçenekler

NPT konik diş ANSI B2 1NPT
ISO 7/1R
PG diş DIN 40430

KORUMA SINIFI

IP55

Seenekler

IP65