






## EVFPL SERIES EX-PROOF STRIP LED LIGHTING FIXTURES

ATEX CERTIFICATE: INSEMEX-OEC.ATEX.18.0301X

CE  II 2 G Ex db II C T6/T5 Gb

CE  II 2 D Ex tb III C T85°C/T100°C Db

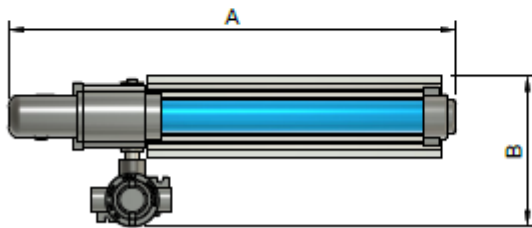

Catalog No.	Power (Watt)	Number of Strip	A (mm.)	B (mm.)	H (mm.)	Light Intensity (lumen)
EVFPL-136	28	1	970	260	140	3500
EVFPL-236	28	2	970	370	140	6600
EVFPL-158	57	1	1570	260	140	6600
EVFPL-258	57	2	1570	370	140	13000

### APPLICATIONS

EVFPL serisi ex-proof strip led lighting fixtures, Zone-1, Zone-21, Zone-2 and Zone-22 suitable for use in ex-proof environments. It can also be produced as a kit if requested.

### MATERIAL

Body; aluminum casting (ETIAL 171)  
Glass; Heat treated borosilicate glass  
Colour: RAL 7040(grey)

### TECHNICAL SPECIFICATIONS

220 V, 50 Hz With energy input  
2x3/4" with hole  
Led driver ve PCB including  
LM 79 With test report

### MECHANICAL PROTECTION TYPE

IP 66